


Research Combustion Lab Facility Capabilities and Throughput Enhanced by New Test Stands


A second test stand has been added to each of two test cells in the Research Combustion Laboratory at the NASA Glenn Research Center. This increased capacity will allow for faster buildup and transition between test programs supporting propulsion research, combustion studies, and advanced materials and structures evaluation. Cell 21 now has two stands capable of supplying gaseous or liquid oxygen, gaseous hydrogen, and gaseous or liquid hydrocarbon propellants (see the following photograph). It provides smaller flow rates to support ignition system testing and subscale propulsion research. Cell 22 has two larger stands providing gaseous hydrogen and oxygen propellants, and also can supply high-pressure cooling water (see the photograph on the next page). It is used primarily to support research testing of high-temperature composite materials and structures at typical rocket engine operating conditions.

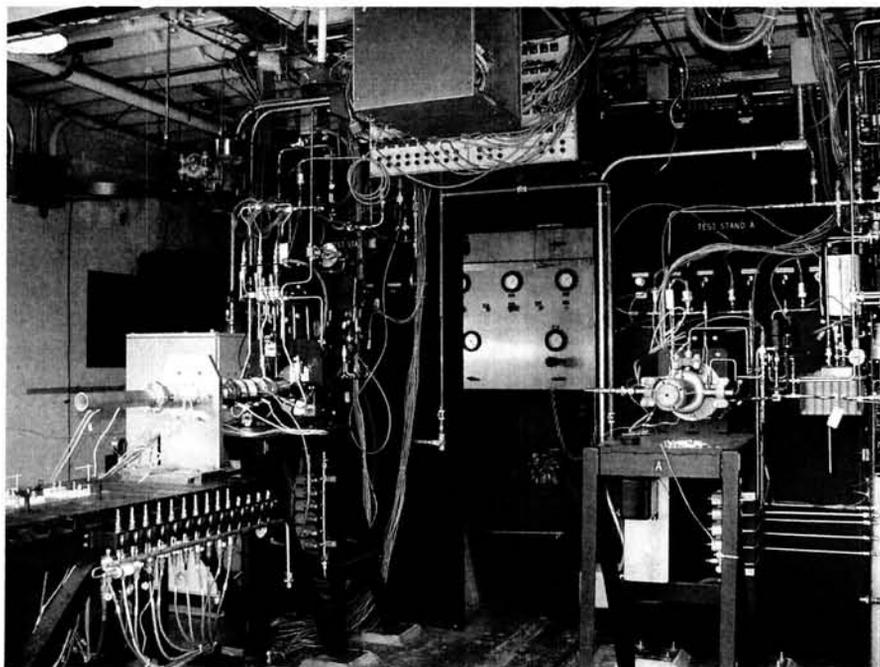

Test Cell 21: The original stand position is on the right. The new second stand is on the left, ready for pulse detonation engine testing.

In each cell, common controls operate the majority of the valves feeding the two stands. Feed line switching is done downstream of the main control valves by changing the connecting lines from the valve to the test article. Cell 21 also has auxiliary valve actuation on each stand to allow for close coupling at the test article. Each cell has a single data system that uses a central patch board to switch between the two test stands' instrumentation configurations. Switching between stands can be done rapidly, in some cases on a daily basis depending on the complexity of the individual test.

The two cells share gaseous oxygen and hydrogen supply trailers, and are typically run on alternating days or sometimes weeks. With the addition of the second stands, each cell can now accomplish more test preparation activity while the other cell is running. The new stands allow for greater flexibility in scheduling tests and provide for more efficient means of utilizing "unplanned" downtime. If a particular test program is delayed because of test hardware delivery or operability problems, another program can be ready and waiting to take advantage of the available time.

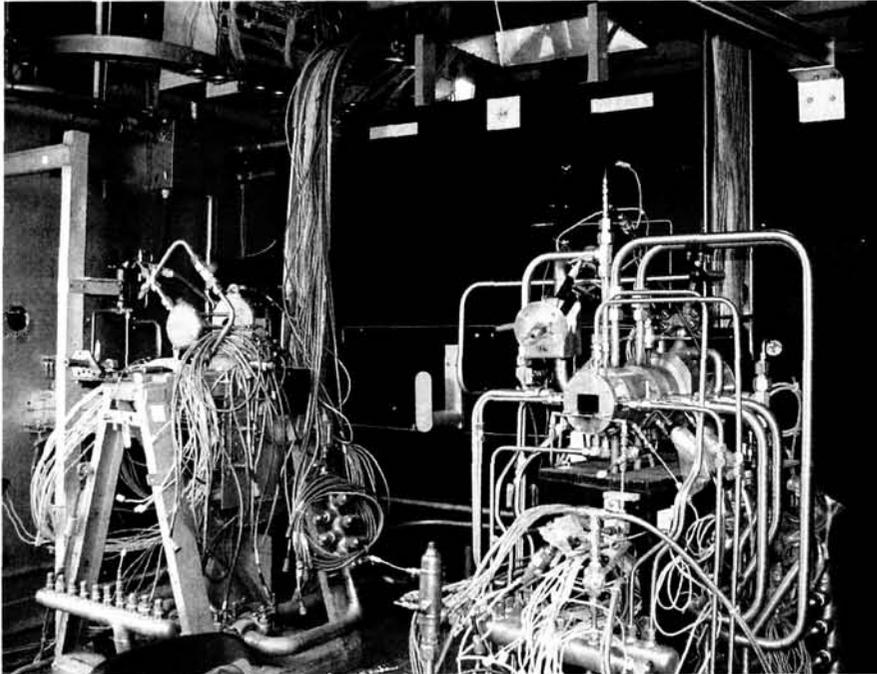

Test Cell 22: Left: Original stand. Right: New stand being prepared for an advanced materials nozzle extension test.

Find out more about this research:
<http://www.grc.nasa.gov/WWW/CRL/>

Glenn contacts:

Joseph Zoeckler, 216-977-7411,
Joseph.G.Zoeckler@nasa.gov; and
Wayne M. Bartlett, 216-433-5745,
Wayne.M.Bartlett@nasa.gov

Author: Joseph G. Zoeckler

Headquarters program office: OAT

Programs/Projects: Propulsion
Systems R&T, STPO, RLV, DDF

Research & Technology 2002



National Aeronautics and
Space Administration

Glenn Research Center
Cleveland, Ohio 44135-3191

NASA/TM—2003-211990